

SP0850JFH

履带式颞式破碎站

CRAWLER JAW CRUSHING PLANT



产品特点 Product Advantages

- ◆ 超大功率的动力系统，全液压驱动，启动平稳，动力强劲，有效确保整机运行。
High-power drive system, fully hydraulic driven, ensures smooth startup and robust power output, effectively guaranteeing overall machine operation.
- ◆ 液压系统采用国际领先品牌，拥有全球一流的供应商体系和配套厂家，有效确保服务与零部件供给的及时性。
The hydraulic system incorporates world-renowned brands, supported by a global-tier supplier network and certified supporting manufacturers, ensuring timely service and parts supply.
- ◆ 主机采用采用阿特拉斯技术，欧版深”V“腔型，啮角小，冲程大，破碎比大，产量高。液压调整排料口方便快捷。
The main unit adopts Atlas technology with deep "V" cavity, small meshing angle and large stroke, delivering high reduction ratios and superior throughput. Hydraulic adjustment of the discharge opening enables fast and convenient operation.
- ◆ 控制系统采用无线遥控+本地操作双模式，触摸屏操作。实时监控，智能诊断，一键启停。智能化程度高。
The control system offers dual-mode operation (wireless remote + local control) with touchscreen interface. Featuring real-time monitoring, intelligent diagnostics, and one-touch start/stop, it delivers advanced operational intelligence.

SP0850JFH 履带式颚式破碎站





CRAWLER JAW CRUSHING PLANT



扫一扫视频号获取更多资讯

项目 Item	名称 Description	参数 Parameter
整机 Overall Unit	设备型号 Device Type	SP0850JFH
	发动机总功率 Total Engine Power	154 kW
	整机重量 Total Weight	28 t
	动力方式 Drive Mode	液压 Hydraulic
	处理能力 Processing Capacity	55-150 t/h
	工作尺寸 Working Dimension (L×W×H)	14100×3850×3270 mm
	运输尺寸 Transportation Dimension(L×W×H)	12100×2450×2920 mm
喂料设备 Feeding Equipment	喂料高度 Feeding Height	3210 mm
	料斗容积 Hopper Capacity	4 m ³
	最大喂料尺寸 Max. Feeding Size	400 mm
	给料机尺寸(长×宽) Feeder Size(L×W)	3500×800 mm
破碎主机 Crusher	进料口尺寸(长×宽) Inlet Opening Size(L×W)	800×510 mm
	排料口调节方式 Discharge Opening Adjustment Method	液压 Hydraulic
	排料口调节范围 C.S.S. Range	40-175 mm
	破碎机重量 Crusher Weight	9.5 t
主输送皮带机 Main Conveyor	卸料高度 Discharge Height	2900 mm
	宽度 Width	800 mm
侧料输送皮带机 Side Conveyor	卸料高度 Discharge Height	2300 mm
	宽度 Width	500 mm
行走系统 Travel System	行走控制方式 Travel Control Mode	液压 Hydraulic
	最大爬坡角度 Max. Climbing Angle	20°
除铁器○ Magnetic Separator	除铁器配置 Configuration	永磁 Permanent Magnet
其他配置 Other Configurations	喷淋系统○ Sprinkling System	照明系统 Lighting System
	远程遥控系统 Remote Control System	智能控制系统 Intelligent Control System

*根据客户工况需求,带○标记为选配;
*According to customer's working condition, ○ is optional.

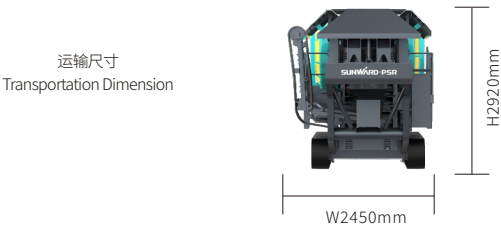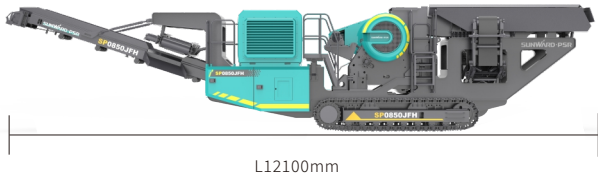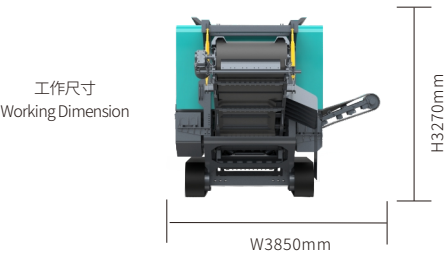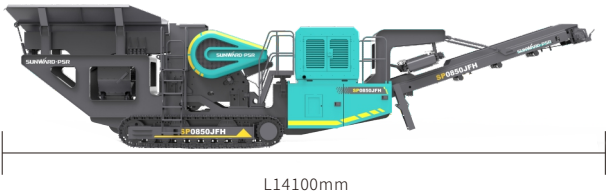

根据公司不断改进产品的方针,我们保留在未事先通知用户的情况下,改变参数和设计的权力,文中插图并不是设备的标准款式,山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward•PSR.

湖南山河普石勒机械设备有限公司
HUNAN SUNWARD & PSR MACHINERY EQUIPMENT CO.,LTD

地址:湖南·长沙·星沙·凉塘东路1335号·山河工业城
Add:Sunward Industrial Park, No. 1335 Liangtang Road (E), Xingsha, Changsha, Hunan, China

销售热线:400-887-8230

