

SP1213IE

履带式反击破碎站(外接电)

CRAWLER IMPACT CRUSHING PLANT (ELECTRIC)



产品特点 Product Advantages

- ◆ 针对不同要求，提供多种配置，能出两种料、三种料或者混合料。
Multiple configurations are provided for different requirements, including materials of two or three types or mixed.
- ◆ 大动能重型转子，破碎比大，产量大，粒型好。
Heavy-duty rotor with large kinetic energy has high crushing ratio and appropriate particle size
- ◆ 集成式变频系统，充分考虑防尘、散热、隔振、防水，电路系统万无一失。
Integrated variable frequency system has multiple functions, including dust-proof, cooling, shock isolation and water-proof, ensuring the safe of electrical system in all aspects.
- ◆ 可选配皮带秤，随时掌握产量。
Optional belt scale is provided to know output at any time.
- ◆ 专业的人机工程设计，保证作业安全。
Professional ergonomics design ensures work safety.

SP1213IE 履带式反击破碎站(外接电)

CRAWLER IMPACT CRUSHING PLANT(ELECTRIC)




扫一扫视频获取更多资讯

项目 Item	名称 Description	参数 Parameter
整机 Overall Unit	工作总功率 Total Working Power	318 kW
	整机重量 Total Weight	57 t
	动力方式 Drive Mode	外接电源 Electric
	处理能力 Processing Capacity	120-350 t/h
	工作尺寸 Working Dimension (L×W×H)	18800×8500×4300 mm
	运输尺寸 Transportation Dimension(L×W×H)	19000×4260×3850 mm
喂料设备 Feeding Equipment	喂料高度 Feeding Height	3700 mm
	料斗容积 Hopper Capacity	10 m ³
	最大喂料尺寸 Max. Feeding Size	600 mm
振动给料机 Vibrating Feeder	给料机尺寸(长×宽) Feeder Size(L×W)	4000×1250 mm
破碎主机 Crusher	进料口尺寸(长×宽) Inlet Opening Size(L×W)	1330×830 mm
	排料口调节范围 C.S.S. Range	15-200 mm
	破碎机重量 Crusher Weight	15.4 t
主输送皮带机 Main Conveyor	卸料高度 Discharge Height	3280 mm
	宽度 Width	1200 mm
振动筛箱 Vibrating Screen Box	筛网层数 Number of deck(s)	1 (2)
	筛网尺寸 Screen Size	4000×1500 mm
返料皮带机 Return Conveyor	卸料高度 Discharge Height	3950 mm
	宽度 Width	500 mm
成品皮带机 Product Conveyor	卸料高度 Discharge Height	3430 mm
	宽度 Width	1000 mm
侧料皮带机○ Side Conveyor	卸料高度 Discharge Height	2855 mm
	宽度 Width	650 mm
行走系统 Travel System	行走控制方式 Travel Control Mode	液压 Hydraulic
	最大爬坡角度 Max. Climbing Angle	20°
除铁器○ Magnetic Separator	除铁器配置 Configuration	永磁 Permanent Magnet
其他配置 Other Configurations	喷淋系统○ Sprinkling System	照明系统 Lighting System
	集中润滑系统 Centralized Lubrication System	远程遥控系统 Remote Control System
	智能控制系统 Intelligent Control System	集成式变频器 Integrated frequency converter

*根据客户工况需求,带○标记为选配;该款设备在选择侧料皮带机时,振动筛箱筛网层数为2层。

*According to customer's working condition, ○ is optional ;The deck of screen is 2 if the side conveyor is selected.

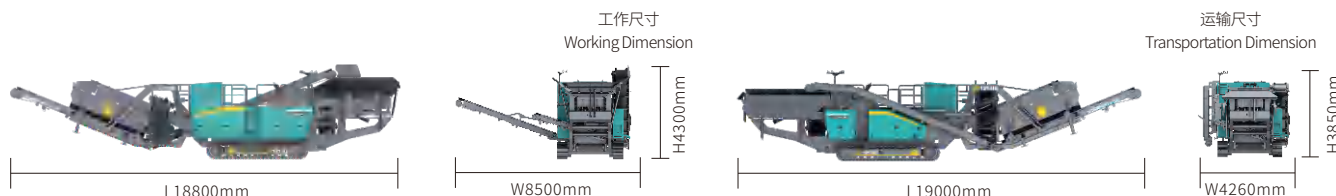

根据公司不断改进产品的方针,我们保留在未事先通知用户的情况下,改变参数和设计的权力,文中插图并不是设备的标准款式,山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward·PSR.