

SP1560SE 履带式筛分站

CRAWLER SCREENING PLANT



产品特点 Product Advantages

- ◆ 智能、自动化电气控制系统，包含自我诊断、安全互锁、自动报警，保障设备安全可靠。
The intelligent electrical control system has functions such as self-diagnosis, safety interlocking and automatic alarms, ensuring the safety and reliability of the equipment.
- ◆ 设计上借鉴运用阿特拉斯技术理念，筛箱侧边采用高强度结构钢，可承受更大振幅、更高频率，明显提高筛分产量和效率。
Both sides of screen box are made of high-strength structural steel, which can withstand greater amplitude and higher frequency, significantly improving screening efficiency.
- ◆ 筛分机侧面设置维修孔，便于检修、换筛网、清料。
The access panel is set on the side of screening machine for the ease of maintenance, cleaning and changing sieves.
- ◆ 标配喷淋系统，减少扬尘、利于环保。
Standard water sprinkling system can effectively suppress fugitive dust and protect the environment.
- ◆ 全方位包围平台、护栏，保障人身安全。
All-round safety rail on the walkways protects personal safety.
- ◆ 筛分机角度可调，对不同物料的适应性更强。
The angle of screen machine is adjustable, adaptable for various materials.

SP1560SE 履带式筛分站


CRAWLER SCREENING PLANT



扫一扫视频号获取更多资讯

项目 Item	名称 Description	参数 Parameter
整机 Overall Unit	工作总功率 Total Working Power	56 kW
	整机重量 Total Weight	32 t
	动力方式 Drive Mode	外接电源 Electric
	处理能力 Processing Capacity	100-380 t/h
	工作尺寸 Working Dimension (L×W×H)	13460×14310×6020 mm
	运输尺寸 Transportation Dimension(L×W×H)	14950×3660×3600 mm
喂料设备 Feeding Equipment	喂料高度 Feeding Height	2500 mm
	料斗容积 Hopper Capacity	3 m ³
	最大喂料尺寸 Max. Feeding Size	150 mm
给料皮带机 Feeding Conveyor	类型 Type	皮带式 Belt Conveyor
	宽度 Width	1000 mm
振动筛箱 Vibrating Screen Box	筛网层数 Number of deck(s)	3
	筛体尺寸 Screen Size	1500×6000 mm
粗料皮带机 Coarse Material Conveyor	卸料高度 Discharge Height	3130 mm
	宽度 Width	500 mm
中料皮带机1(2) Medium Material Conveyor 1(2)	卸料高度 Discharge Height	3280 (3270) mm
	宽度 Width	500 (500) mm
粉料皮带机 Fines Conveyor	卸料高度 Discharge Height	3210 mm
	宽度 Width	1000 mm
行走系统 Travel System	行走控制方式 Travel Control Mode	液压 Hydraulic
	最大爬坡角度 Max. Climbing Angle	20°
其他配置 Other Configurations	喷淋系统○ Sprinkling System	照明系统 Lighting System
	集中润滑系统 Centralized Lubrication System	远程遥控系统 Remote Control System
	智能控制系统 Intelligent Control System	软启动器 Soft Starter

*根据客户工况需求,带○标记为选配;
*According to customer's working condition, ○ is optional.

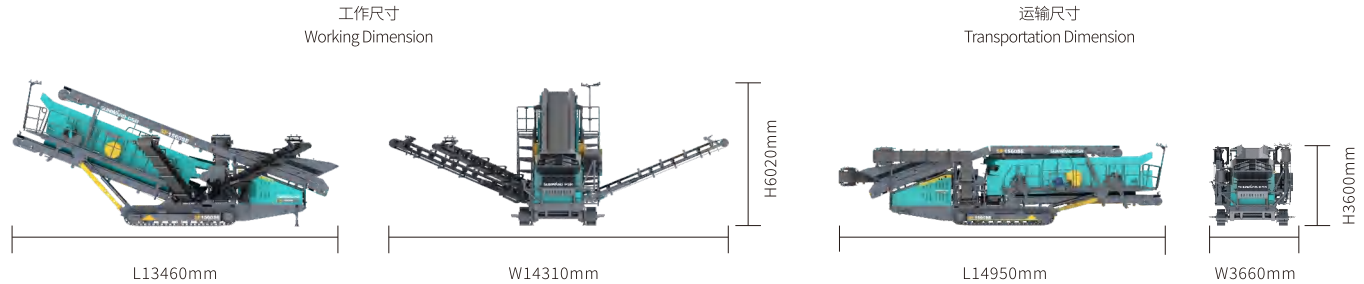

根据公司不断改进产品的方针,我们保留在未事先通知用户的情况下,改变参数和设计的权力,文中插图并不是设备的标准款式,山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward•PSR.

