


SP1845SHHD履带式重型筛分站 HEAVY DUTY SCREENING PLANT

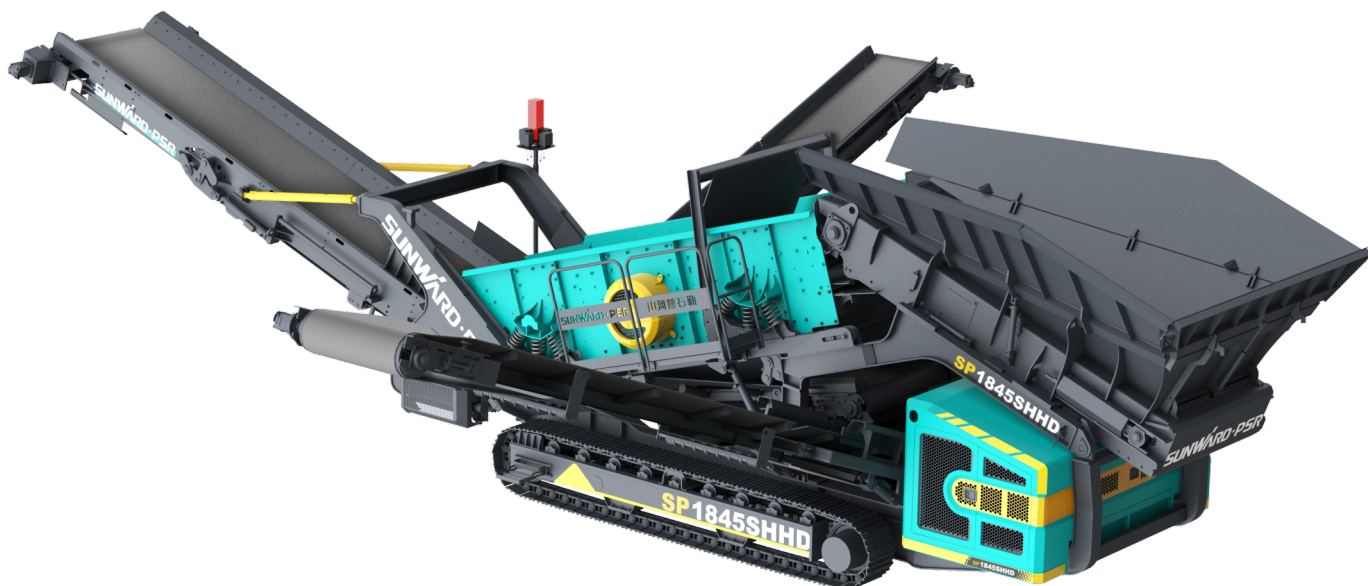

产品特点 Product Advantages

- ◆智能液压，省油高效：主系统按作业需求自动调节动力输出，动力与节能兼得。
Intelligent Hydraulics for Fuel Efficiency and High Performance: The main hydraulic system automatically adjusts its power output according to real-time operating demands, delivering both strong performance and exceptional fuel savings.
- ◆输送流畅，要求更低：输送系统精准动力匹配，效率提升的同时，对液压动力需求更低。
Smooth Material Conveying with Lower Power Requirements: The conveying system is precisely matched for hydraulic efficiency, improving throughput while reducing overall hydraulic power demand.
- ◆动力升级，底气十足：加大发动机功率，应对高强度工况轻松自如。
Upgraded Power, Confident in Tough Conditions: An increased engine power rating allows the machine to easily handle high-intensity working conditions with enhanced stability and reserve power.
- ◆扭矩强化，产出倍增：提升扭矩输出，带来更强劲的处理能力和更高的生产效益。
Reinforced Torque Output for Higher Productivity: Strengthened torque delivery enables more powerful material handling and significantly improves overall production capacity and efficiency.
- ◆筛箱可安装多种筛网，如篦条筛、针状筛、冲孔筛、编制筛网等，有效适应不同工况。
Multiple types of sieve can be installed in the screenbox, such as bar sieve, perforated sieve, woven sieve, adapting to different working conditions.

产品应用 Product Application

破碎前的预筛分及破碎后的细筛分；可单独作业，也可与初级破碎站联合作业。

广泛适用于矿山、建筑废弃物、沥青及混凝土搅拌站内的骨料筛分，以及表层土处理、河卵石、戈壁滩碎石及其他行业物料的筛分。

This product can be used as pre-screening before crushing and as screening after crushing. It can work independently or work in conjunction with other primary crusher. It is widely used for the aggregates screening in mining, construction wastes processing, asphalt and concrete batching plant, as well as the screening operation of topsoil treatment, pebbles, gobi desert gravel and other materials in the industry.

SP1845SHHD履带式重型筛分站


HEAVY DUTY SCREENING PLANT



扫一扫视频号获取更多资讯

项目 Item	名称 Description		参数 Parameter
整机 Overall Unit	工作总功率	Total Working Power	147 kW
	整机重量	Total Weight	32 t
	动力方式	Drive Mode	全液压驱动 Fully hydraulic
	处理能力	Processing Capacity	200-600 t/h
	工作尺寸	Working Dimension (L×W×H)	15400×14620×4220 mm
	运输尺寸	Transportation Dimension(L×W×H)	13300×3600×3460 mm
喂料设备 Feeding Equipment	喂料高度	Feeding Height	3330 mm
	料斗容积	Hopper Capacity	8.1 m ³
	最大喂料尺寸	Max. Feeding Size	500 mm
给料皮带机 Feeding Conveyor	类型	Type	板链式 Apron feeder
	宽度	Width	1200 mm
振动筛箱 Vibrating Screen Box	筛网层数	Number of deck(s)	2
	筛体尺寸	Screen Size	1800×4500 mm
粗料皮带机 Coarse Material Conveyor	卸料高度	Discharge Height	3270 mm
	宽度	Width	1400 mm
中料皮带机 Medium Material Conveyor	卸料高度	Discharge Height	2850 mm
	宽度	Width	800 mm
粉料皮带机 Fines Conveyor	卸料高度	Discharge Height	3670 mm
	宽度	Width	1000 mm
行走系统 Travel System	行走控制方式	Travel Control Mode	液压 Hydraulic
	最大爬坡角度	Max. Climbing Angle	20°
其他配置 Other Configurations	喷淋系统○	Sprinkling System	照明系统 Lighting System
	集中润滑系统	Centralized Lubrication System	远程遥控系统 Remote Control System
	智能控制系统	Intelligent Control System	

*根据客户工况需求,带○标记为选配;
*According to customer's working condition, ○ is optional .

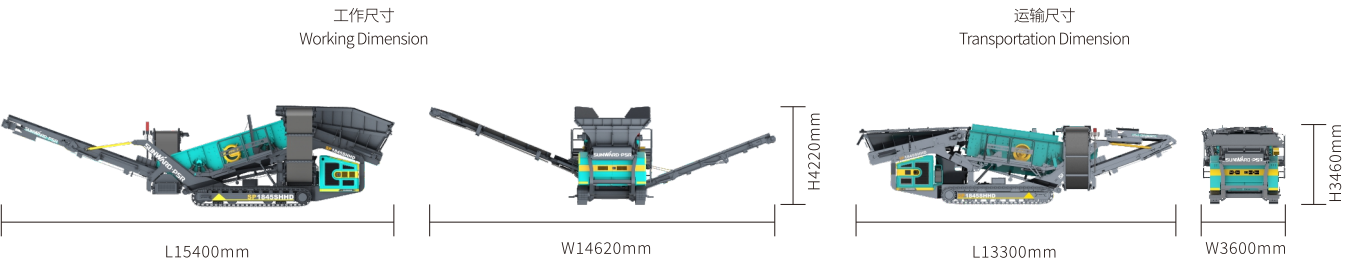

根据公司不断改进产品的方针,我们保留在未事先通知用户的情况下,改变参数和设计的权力,文中插图并不是设备的标准款式,山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward•PSR.

湖南山河普石勒机械设备有限公司
HUNAN SUNWARD & PSR MACHINERY EQUIPMENT CO.,LTD

地址:湖南·长沙·星沙·凉塘东路1335号·山河工业城
Add:Sunward Industrial Park, No. 1335 Liangtang Road (E), Xingsha, Changsha, Hunan, China

销售热线:400-887-8230

