


SPS系列 轮斗式洗砂机

BUCKET WHEEL SAND WASHER

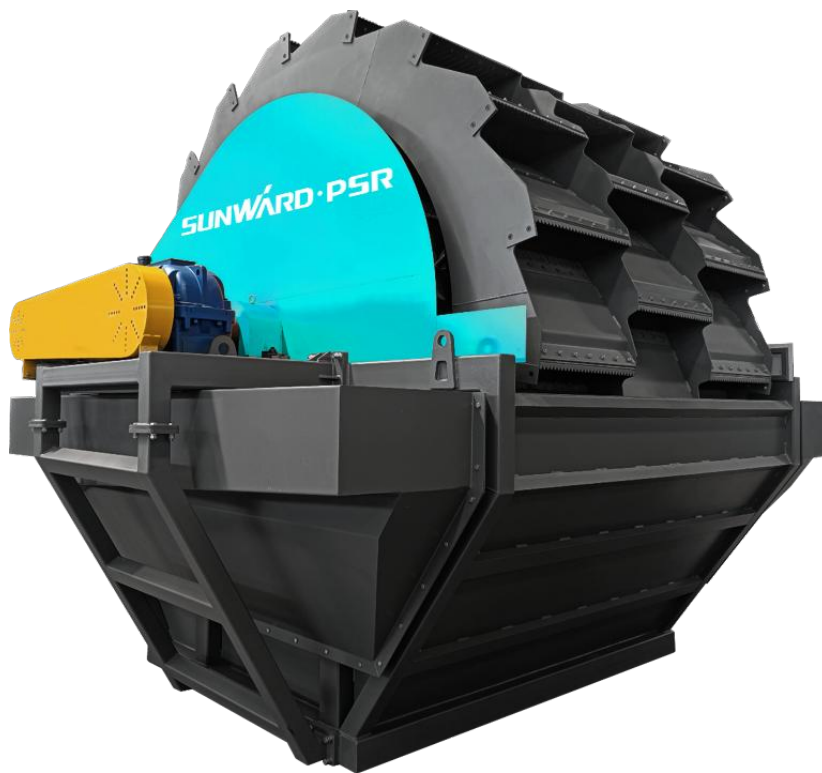

产品特点 Product Advantages

- ◆ 轮斗过滤孔形状及排列经过优化设计，控水面积大、避免砂堵孔、控水效果好；
The wheel-bucket's filter holes feature an optimized shape and arrangement design, providing large water control area, preventing sand clogging, and delivering excellent water control performance.
- ◆ 双侧排污为百叶窗式稳流结构，渐变式溢流装置，水流平稳、溢流面积大、细砂流失少；
Equipped with dual-side drainage featuring louver-type flow stabilization structure and gradual overflow device, ensuring smooth water flow, large overflow area, and minimal fine sand loss.
- ◆ 轮斗结构可拆卸、更换方便，材质选用不锈钢、寿命高；
The wheel-bucket structure is detachable for easy replacement, constructed with stainless steel for extended service life.
- ◆ 轮斗下部配有防污挡板，防止污水循环污染；
The lower part of wheel-bucket is fitted with anti-contamination baffle to prevent sewage recirculation pollution.
- ◆ 进料口上部配有高压喷淋系统，能让砂得到二次冲洗；
The feeding inlet is equipped with an upper high-pressure spray system for secondary sand washing.

SPS系列

轮斗式洗砂机

BUCKET WHEEL SAND WASHER



扫一扫视频号获取更多资讯

型号 Model	叶轮规格(宽度×外径) (m) Impeller Specification (Width × Outer Diameter)	产能(t/h) Capacity	进料粒度(mm) Feed Particle Size	功率(kW) Power	外型尺寸(长×宽×高)(MM) Overall Sizes (L×W×H)
SPS2514WS	1.4×2.5	80-120	≤10	5.5	3100×3338×2822
SPS3615WS	1.5×3.6	120-180	≤10	7.5	4410×3880×3905
SPS3623WS	2.3×3.6	180-220	≤10	11	4410×4630×3905
SPS4223WS	2.3×4.2	220-300	≤10	15	5010×4660×4505
SPS3630WS	3.0×3.6	220-350	≤10	7.5×2	4410×5650×3905
SPS4830WS	3.0×4.8	300-450	≤10	11×2	5610×5650×5105
SPS5430WS	3.0×5.4	400-550	≤10	11×2	6210×5650×5705

根据公司不断改进产品的方针, 我们保留在未事先通知用户的情况下, 改变参数和设计的权力, 文中插图并不是设备的标准款式, 山河普石勒保留最终解释权。
The parameters and design could be modified according to our upgrading plan. The illustration is not indicating the standard equipment. All rights reserved by Sunward•PSR.

